

Midwestern States In-Place Recycling Conference

HOT-IN-PLACE RECYCLING

Presented by:

Patrick Faster, ARRA

August 12, 2009



Go Green, Save Green



ARRA Recycling Disciplines

- Cold Planing / Milling
- Hot in Place Recycling
- Cold in Place Recycling
- Full Depth Reclamation
- Soil Stabilization



Go Green, Save Green

Sub-categories with the HIR Discipline

- Surface Recycling
- Surface Repaving
- Remixing



Go Green, Save Green

What is the Hot-in-Place Recycling **SURFACE METHOD?**

Hot In-Place Recycling (HIR) is an on-site, in place, pavement rehabilitation method that consists of heating, scarifying, softening, mixing, replacing and re-compacting the existing bituminous pavement. The HIR surface method process will introduce a polymer modified rejuvenating agent typically at the rate of 1/10th gal. Per sq. yd. The now re-plasticized asphalt is ready to receive its final surface course, be it HMA overlay, micro surface, slurry or chip seal.




Go Green, Save Green

HIR

Where Does IT Fit In?

Re-Construction

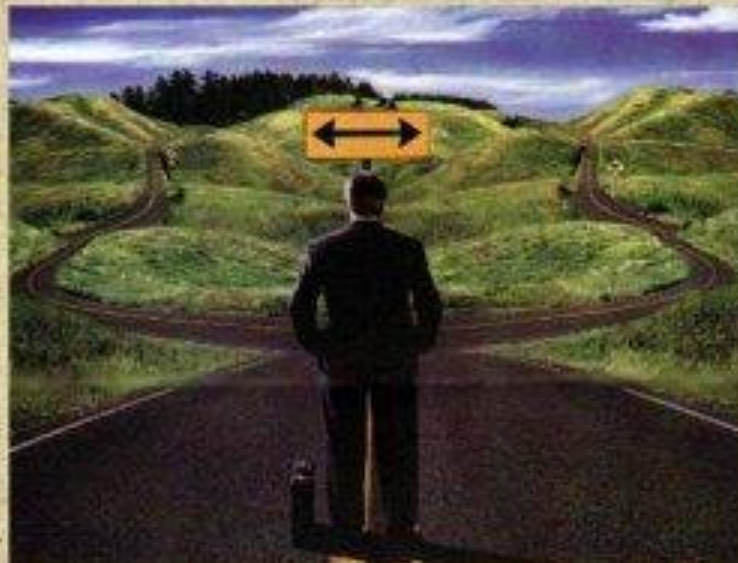

Preventive
Maintenance

Value of "Timely" Pavement Maintenance

Pavement Condition

Very Good

Good

Fair

Poor

Very Poor

Time for HIR

Time (Years)

0

2

4


6

8

10

12

14

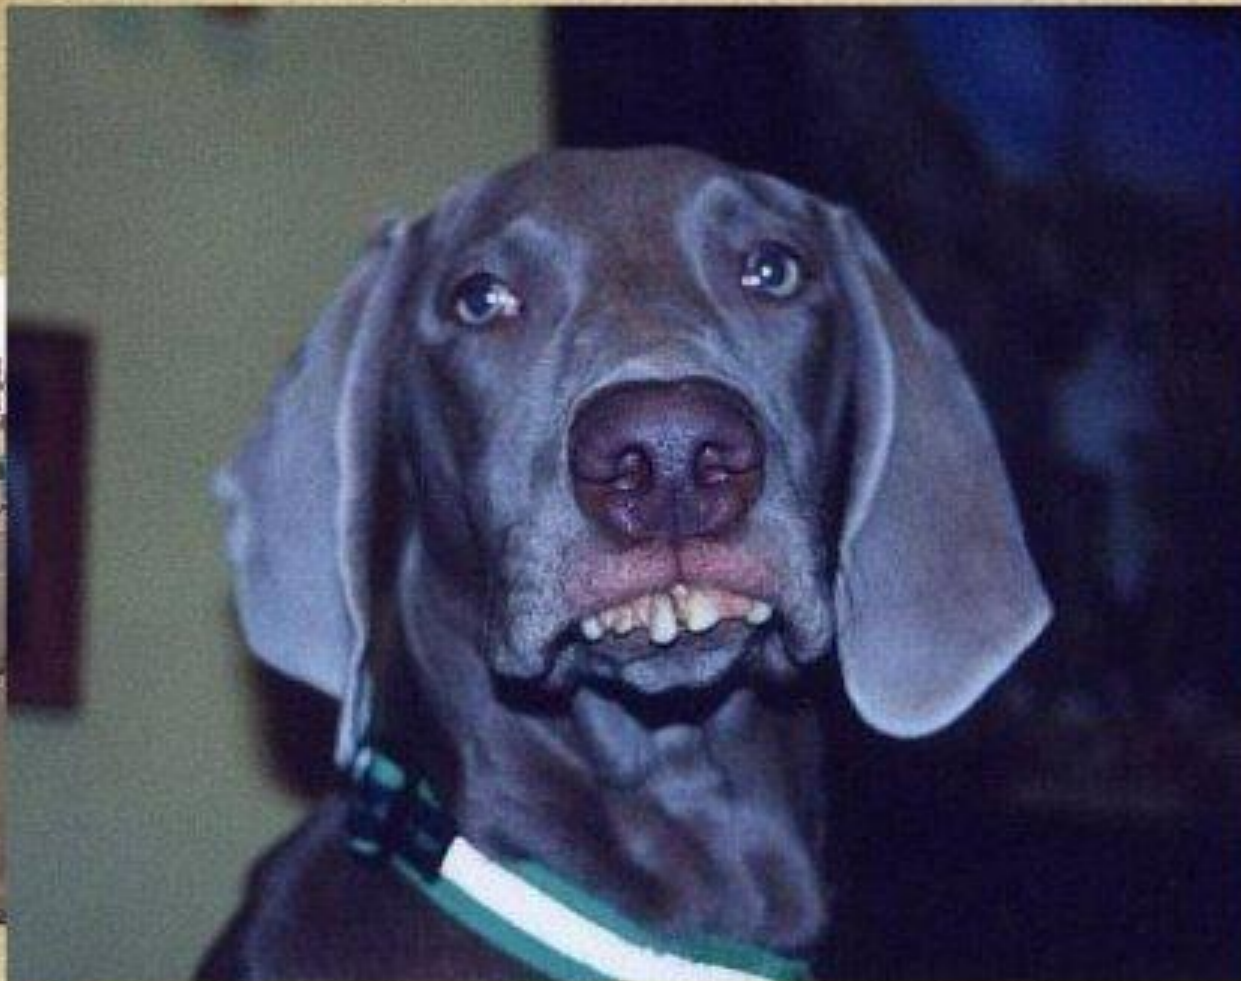

Hot
inPlace
RECYCLING



Go Green, Save Green

Typical 75mm Mill & Fill

- Grind to a 3 in. depth
- Haul grindings away
- Tack course
- Haul leveling course back
- Place 1.5 inch level course
- Roll It
- Place 1.5 inch surface course
- Roll It



Typical Reconstruction Using HIR

- 1st Pre-Heater takes pavement temp to 180 – 200 degrees



Typical Reconstruction Using HIR

- 2nd Heater takes pavement temp to 280 – 300 degrees



Typical Reconstruction Using HIR

- Introduction of rejuvenating agent



Typical Reconstruction Using HIR

- Tines set hydraulically at prescribed depth



Typical Reconstruction Using HIR

- Full width reversible augers to re-mix



Typical Reconstruction Using HIR

- Re-profiling and compaction with screed



Typical Reconstruction Using HIR

- Roller



Typical Reconstruction Using HIR



- Open to traffic !!





Hot
inPlace
RECYCLING



Go Green, Save Green



**Hot
inPlace**
RECYCLING



Go Green, Save Green

So What Have We Done?



**Hot
inPlace**
RECYCLING



Go Green, Save Green

Typical Pavement Rehabilitation Designs

Pavement Profiling 3" with 1-1/2" Binder & 1-1/2" Surface Replacement

Item Description	Qty	Unit	Total
Bituminous Concrete Surface Removal 3"	18,000 SY	\$1.90	\$34,200.00
Bituminous Material Prime Coat	1,800 GAL	\$1.80	\$3,240.00
Bituminous Concrete Binder Cse 1-1/2"	1,500 Tons	\$48.00	\$72,000.00
Bituminous Concrete Surface Cse 1-1/2"	1,500 Tons	\$51.00	\$76,500.00
Estimated Cost =			\$185,940.00

Heater Scarification Asphalt Modifier and 1-1/2" Surface Replacement (no grinding).


Item Description	Qty	Unit	Total
Heater Scarification	18,000 SY	\$2.50	\$45,000.00
Asphalt Modifier	1,800 GAL	\$3.50	\$6,300.00
Bituminous Concrete Surface Cse 1-1/2"	1,500 Tons	\$51.00	\$76,500.00
Estimated Cost =			\$127,800.00



Savings of \$58,140 = 31% !!!!

Go Green, Save Green

- IDOT-approved
- Qualifies for MFT monies

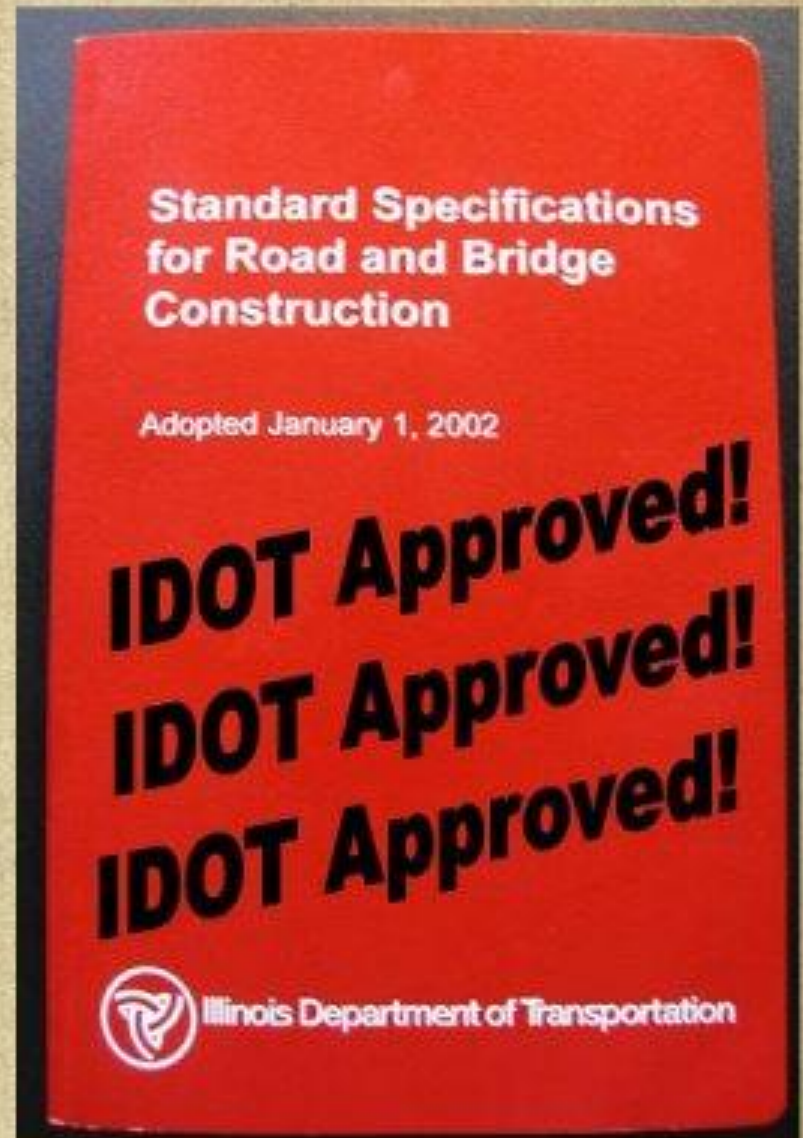

Go Green, Save Green

Preventive Maintenance / Pavement Preservation

- Micro-Surfacing



Preventive Maintenance / Pavement Preservation

- Slurry Seal



Preventive Maintenance / Pavement Preservation

- Chip Seal





www.hotinplacerecycling.com

Go Green, Save Green

Thank You! Any Questions?



www.hotinplacerecycling.com




Go Green, Save Green



**Hot
inPlace**
RECYCLING

www.hotinplacerecycling.com

Go Green, Save Green

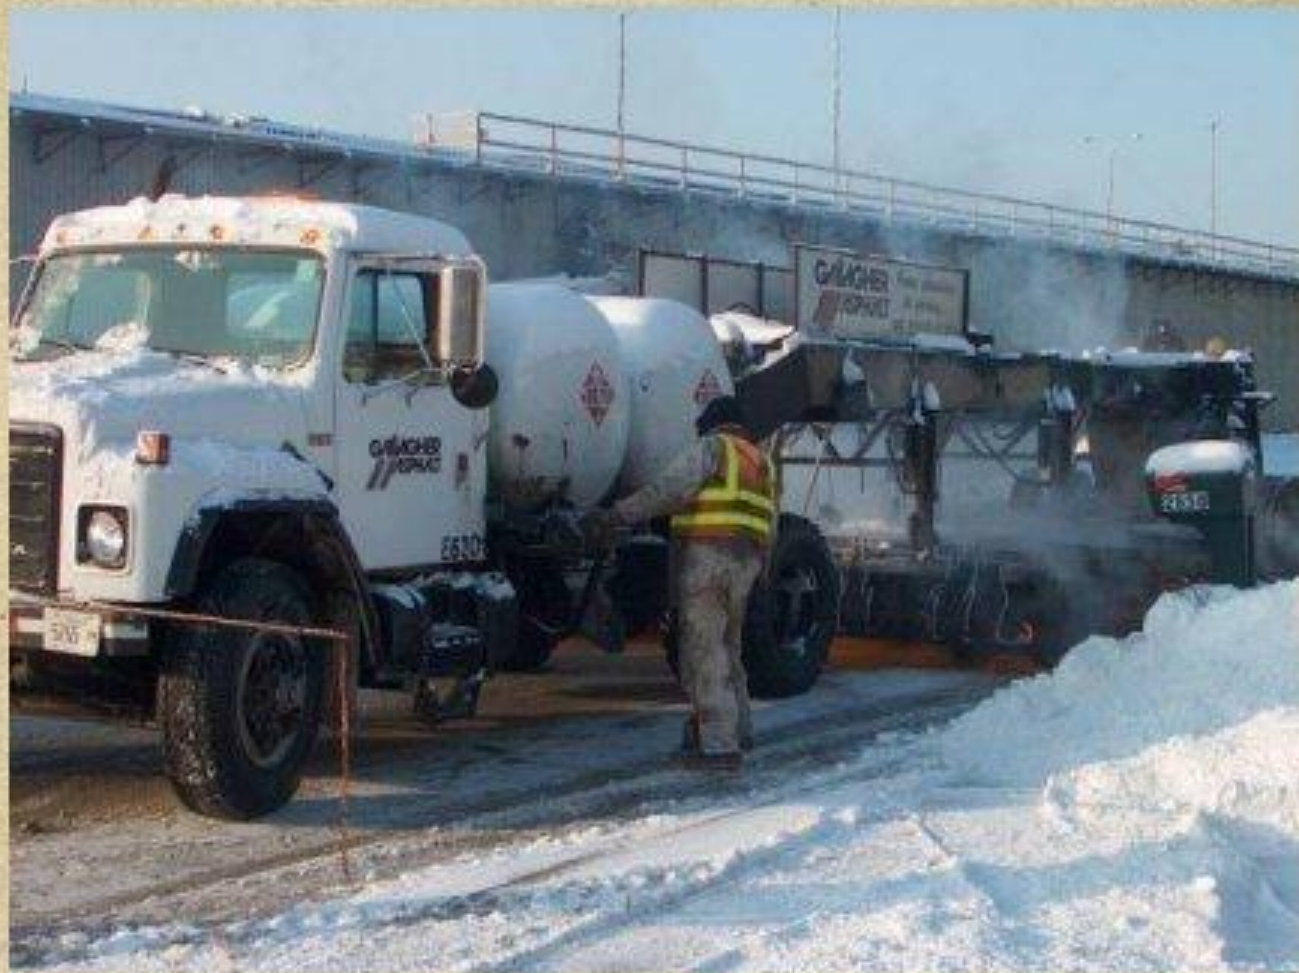

**Hot
inPlace**
RECYCLING

www.hotinplacerecycling.com

Go Green, Save Green



**Hot
inPlace**
RECYCLING

www.hotinplacerecycling.com

Go Green, Save Green



**Hot
inPlace**
RECYCLING

www.hotinplacerecycling.com

Go Green, Save Green



**Hot
inPlace**
RECYCLING

www.hotinplacerecycling.com

Go Green, Save Green