



Northeast & Mid-Atlantic States In-Place Recycling Conference

Asphalt Recycling & Reclaiming
Association: ARRA

US. Department of Transportation
Federal Highway Administration



Cold In-Place Asphalt Recycling

Overview

Michael L. Polak

E.J. Breneman L.P.



What will be covered

- Introduction
- What is Cold In-Place Asphalt Recycling
- Why Cold In-Place Asphalt Recycle?
- What does a candidate look like
- Equipment
- QC QA: Inspection
- Utilities and curb reveal in urban areas
- Preparation before CIR
- Additives: Emulsions, Portland cement, Fly-ash
- Differing types of Projects

What is Cold In-Place Recycling?

- The recycling of a deteriorated asphalt pavement material that has reached the end of its useful life. This includes asphalt wearing and asphalt base course material and in some cases a small amount of the underlying aggregate. Typical depths are 3 to 5 inches.
- The milling machine or processing unit cuts and sizes the old asphalt. The material is then mixed in-place with a new asphalt binder, paver-laid and compacted to the desired depth and scope of the project specifications.



CIR – Okeechobee Runway 14/32, 2002

What does a CIR candidate look like?

- Transverse and Longitudinal cracking
- Alligator cracking
- Oxidized, raveled pavement
- Some structural deficiencies
- Patched area on top of patched area
- Multiple overlays



Why CIR?

Asphalt pavements eventually will develop distress such as:

- Cracking
- Raveling
- Pot holes
- Poor ride quality

Traffic, weather and hardening of the asphalt binder all contribute to these problems.

- We can rejuvenate these pavements





Why CIR

- Totally restores old asphalt into new binder courses.
- Saves time, saves fuel and saves funding
- Saves our natural resources like aggregate and imported and domestic crud oil.
- Helps to deplete already large quantities of stored RAP
- Commonsense tells us to recycle



Benefits of Cold In-Place Recycling

- Roadway remains open during construction
- Conserves energy and natural resources
- Reduced impact to adjacent roadways
- Reduced cost over reconstruction
- Re-use existing material
- Reprofile roadway
- Restores curb reveal
- Construction time halved





Road Preparation for CIR

- Any damaged cross pipes should be replaced.
- Drainage and water problems should be addressed
- Any vegetation growing on the pavement should be removed.
- Shoulder or pavement widening should take place before CIR
- Any under ground utilities should be addressed

The CIR Process

- Core the roadway and perform a mix design
- Any widening should take place prior to CIR
- The CIR train pulverizes, mixes and paver lays the new asphaltic base course to the desired cross-slope
- Compact with a 10-12 ton steel wheel roller
- Place the HMA surface course





Things to Consider in a CIR - QC/QA Plan

Document Review

- Bid specifications
- Mix design
- Special provisions
- Agency requirements
- Traffic control plan



Things to consider in a CIR - QC/QA Plan

- Mandatory preconstruction meeting
- Equipment inspection
- Check the mill is correct Single Unit down cut
- Multiunit has screen and crushing capabilities
- Additive Systems both water & asphalt and any
other additive system is calibrate

Things to consider in a CIR – QC/QA Plan

- All meters and computers should be calibrated
- Recycling additive – check on specifications and compliance.
- Recycled mat smoothness
- Moisture added to RAP
- Compacted density
- RAP gradation
- Moisture content before overlay
- Recycling additive content
- Depth of pulverization/milling 3" – 5"





Things to consider in a CIR – QC/QA Plan

- Pavers are in good working condition and of the right size and width
- Rollers meet the requirements both steel drum and pneumatic.
- Check depth of recycled mix
- Take representative mixed material sample for future comparison & testing
- Weather requirements

Core samples are essential in any Cold In-Place Recycling project



CIR – Aggregate Application

➤ existing asphalt pavement properties may be enhanced with the addition of aggregate or RAP. Not only can the mix properties be improved, but additional structure may also be added to the asphalt pavement.



Curb-line milling performed by a specialized road widener

- The Bartmill PR205 is a specialized piece of equipment that is used for widening.
- This type of equipment is capable of widening from one to four feet per pass.







Pavement is recycled and curb reveal restored





Manhole and utility valve milling



Excavated manhole before recycling




Compaction of recycled asphalt around manhole






CIR – Pavement Widening

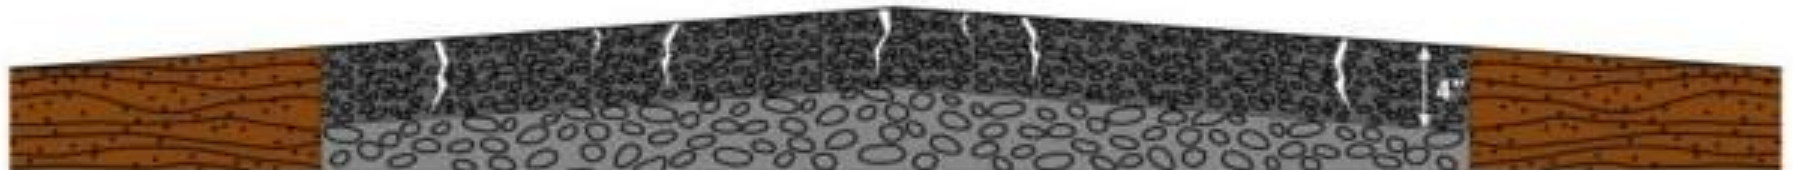

Existing section before CIR



Proposed widening section (addition of stone or RAP)



Completed widening section after CIR

- ● ●

Specialized mill excavates shoulder to desired depth



Excavated shoulder backfilled





Classes of Cold In-Place Recycling

- **Multi-Unit Train Pulverize, Screen, Crush, Add Recycling Agent Based on RAP Weight & Mix in Pugmill**
- **Two-Unit Train Pulverize, Add Recycling Agent Based on RAP Weight & Mix in Pugmill**
- **Single Unit Train Pulverize, Add Recycling Agent – All in Cutting Chamber of Milling Machine**



Single Unit Train

- **Proportioning of Recycling Agent based on volumetric (depth and width of cut and forward speed of train)**
- **Down cutting milling head, sizes material, forward speed of train**
- **Material is mixed in milling head chamber**



Single Unit Train





Directly into a bituminous paver





Two-Unit Train

- Variable width cutting head
- Down Cutting milling machine sizes RAP
- Belt Scale weighs RAP and microprocessor controls additive
- Recycling Agent added and blended with RAP in twin-shaft pug mill



Multi-Unit Train



Multi-Unit Train –Screening/Crushing

- All reclaimed asphalt pavement (RAP) is screened to a maximum size requirement (typically 1.25”).
- The oversized material is crushed and returned to the screen deck for total sizing control.



Multi-Unit Train - Pug mill

- Belt scale weighs RAP, microprocessor controls additives
- Multiple additives may be added simultaneously
- Pugmill thoroughly blends RAP and additives



CIR - Laydown

Traditional Asphalt Pavers Used or ...









● ● ● Both pneumatic and steel drum rollers are used for compaction



Quincy Gadsen Airport - Design/Build, Quincy, FL
1997

COLD RECYCLING AFTER OVERLAY





CIR – Mix Design

- Obtain Sample of RAP from Field
- Determine RAP Gradation, Binder Content, Extracted Gradation and Aged Binder Properties
- Select Amount and Gradation of Additional Aggregate, if required
- Select Type and Grade of Recycling Additive
- Determine Pre-Mix Moisture Content
- Test Trial Mixtures: Initial Cure Properties, Final Cure Properties, and Water Sensitivity
- Establish Job Mix Formula



CIR – Selection of Additive(s)

Bituminous Additives:

➤ Asphalt Emulsion (with & without polymer)

Anionic Emulsions

HFMS-2

Cationic Emulsions

HFMS-2s

CSS & CMS

➤ Cutback Asphalts

➤ Rejuvenating Agents

➤ Foamed Asphalt



CIR – Selection of Additives

Chemical Additives:

- **Portland Cement – Dry or Slurry (1-2%)**
- **Hydrated Lime – Dry or Slurry (1-2%)**
- Portland Cement & Hydrated Lime have been used in conjunction with asphalt emulsion to improve early strength, increase rut resistance and improve moisture resistance
- **Fly Ash – Class C Fly Ash (8-12%)**
Used to cement RAP particles together

Weather Limitations



- Air Temperature of 50 Degrees F. is preferred.
- Heavy Rain must not be occurring.



Problems associated with Moyer Road

No drainage (natural or storm water inlets)

No crown or cross slope

No curbs

Trees and utility poles at edge of pavement

To many width changes in roadway



Moyer Road 1992

Moyer Road 1992



Moyer Road, existing problems



New curb and storm water catch basin



- ● ● | **Gas, water, sanitary sewer services replaced before CIR**



CIR first pass along new curb



● ● ● | Gradation of Cold In-Place Asphalt Recycling (CIR)



Cold In-Place Asphalt Recycling before hot mix overlay



Moyer Road 2007



Delaware Department of Transportation



● ● ● | **Bad cross section,
bleeding chip seal, standing
water**



● ● ● | **8% percent cross slope
create water problems**



Corrugated cracks



● ● ● | **RAP is then added to adjust cross slope to 2% or 3%**



RAP paver-laid before Cold In-Place Recycling



Old Pavement & RAP material under go CIR treatment



Cold In-Place Recycled Asphalt Lorewood Grove Road



Gradation of Cold In-Place Recycled material



New hot mix wearing course and aggregate shoulders



194 2 15



Harford County Maryland

Jarrettsville Road 2004












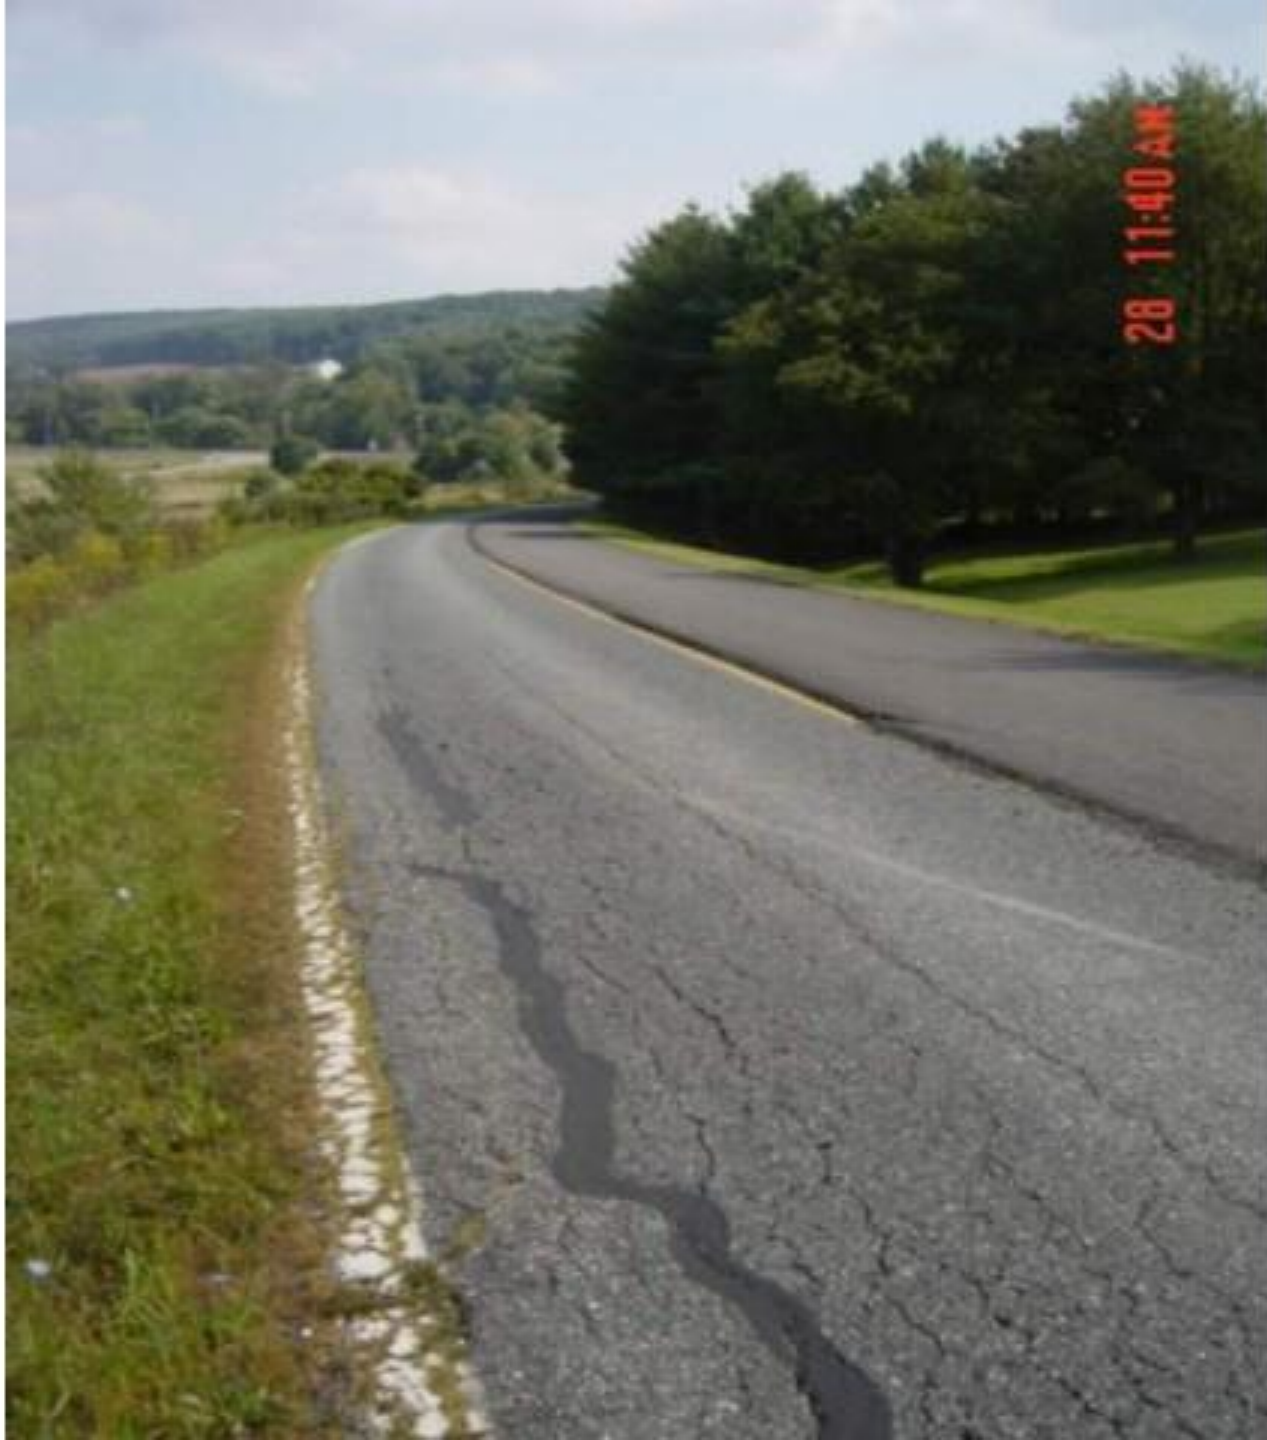









28 12:03 PM



Upper Providence Township

Montgomery County, Pennsylvania
2007













Quincy-Gadsden Airfield

To-date 7 airfields in the State of Florida
have been Cold In-Place Recycled





















Portland Cement Base

The use of Portland cement as an additive used with the Cold In-Place Asphalt Recycling Train

“In-Place Paver Laid Cement Stabilization”





















In-Place Cement Stabilization

Limerick Township













CIR – Rural Highway



CIR – Town and City



CIR - Business Districts





CIR – Runway, Taxiway, Parking Areas



CIR - Night Work





Full width paving or other paving processes



Thank You! Questions

